



Timetable Design Theory and Practice

Harrod, Steven

Publication date:
2017

Document Version
Peer reviewed version

[Link back to DTU Orbit](#)

Citation (APA):
Harrod, S. (Author). (2017). Timetable Design Theory and Practice. Sound/Visual production (digital)

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

Timetable Design Theory and Practice

7th International Conference on Railway Operations
Modelling and Analysis

Dr. Steven Harrod

4 April, 2017



DTU Management Engineering

Danmarks Tekniske Universitet/Technical University of Denmark

Today's Program

- The Timetable Design Process
 - Current Practice
 - The stakeholders
 - Timeline
- Micro Optimization of the Train Path Plan
 - MISLP
 - BIOP
 - Hypergraph
 - PESP
- Future Opportunities




Why Do We Need a Timetable?


Gør det selv!



The Timetable is Central to All

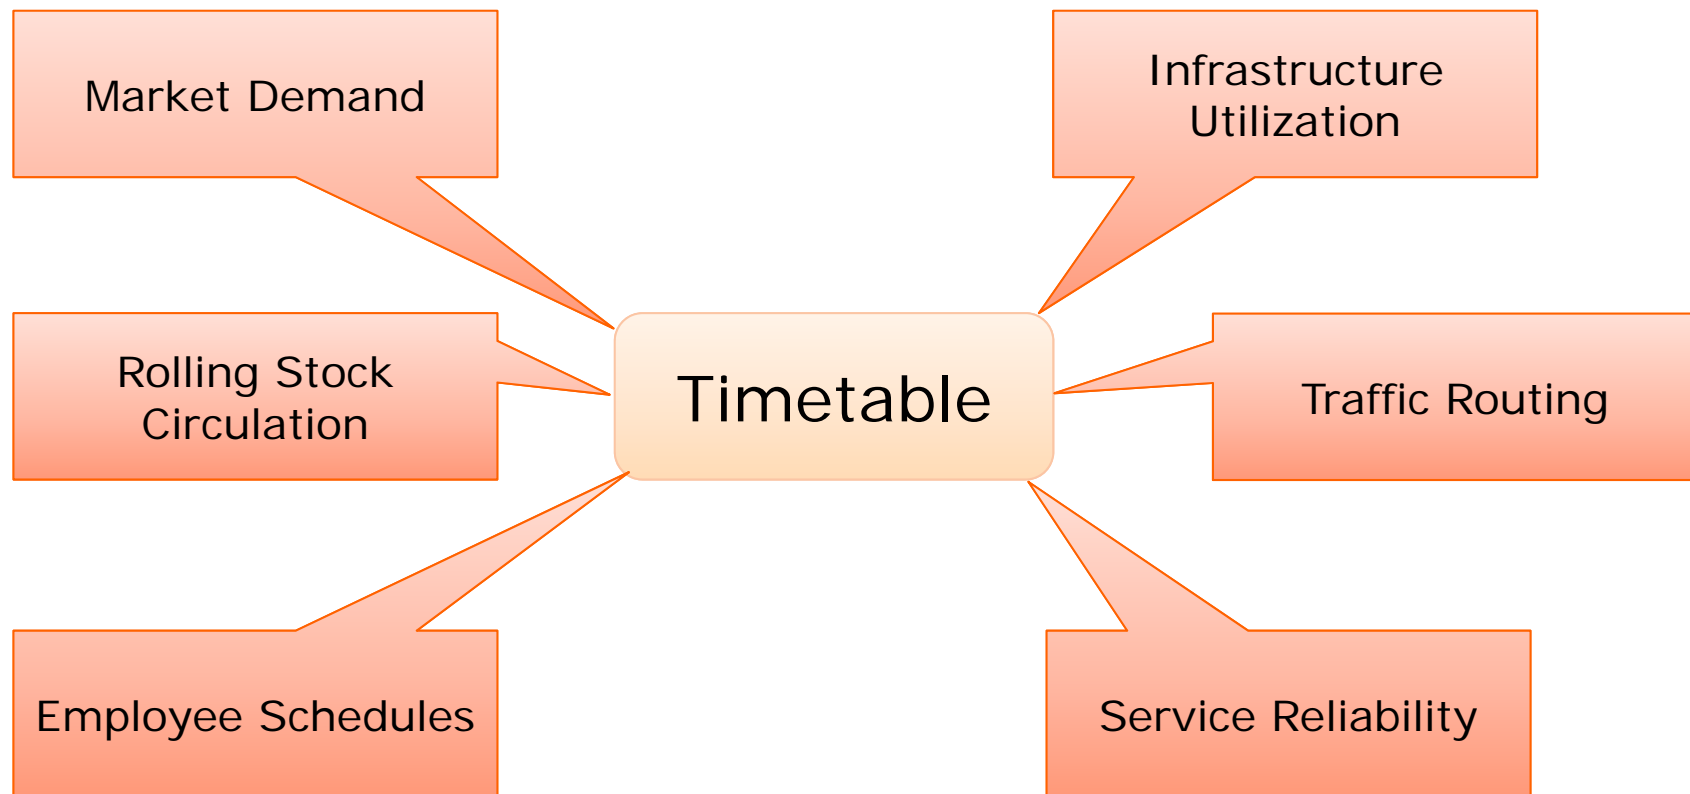

The Timetable Design Process

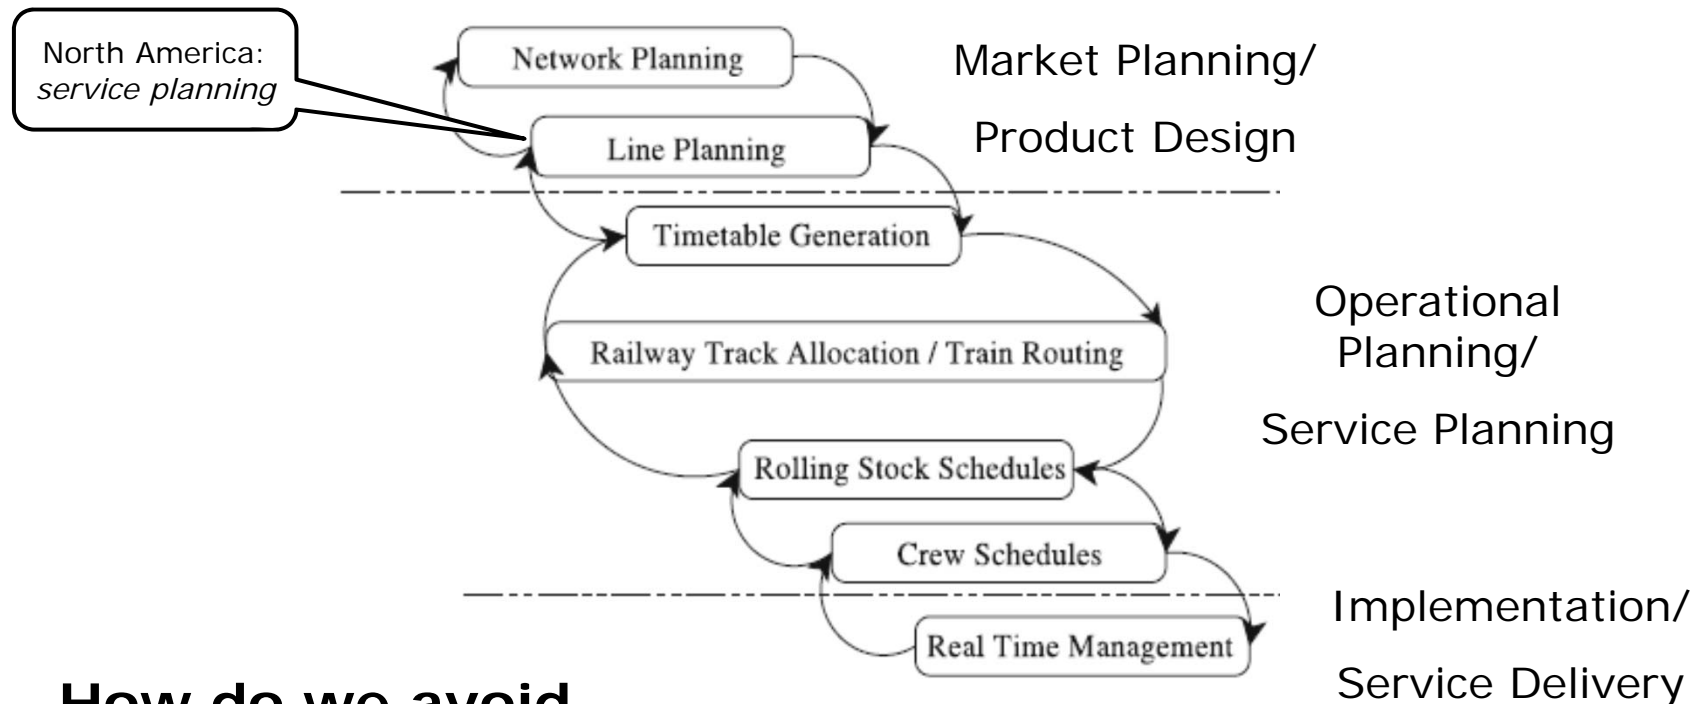


How do we avoid the feedback loops?

The railway track allocation step does not exist in North American practice.


The Application is Fairly Universal

Danish - DSB

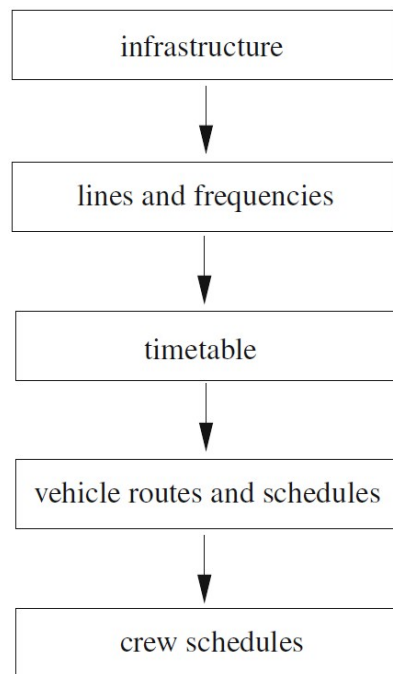


DSB (2015)

Netherlands - NS

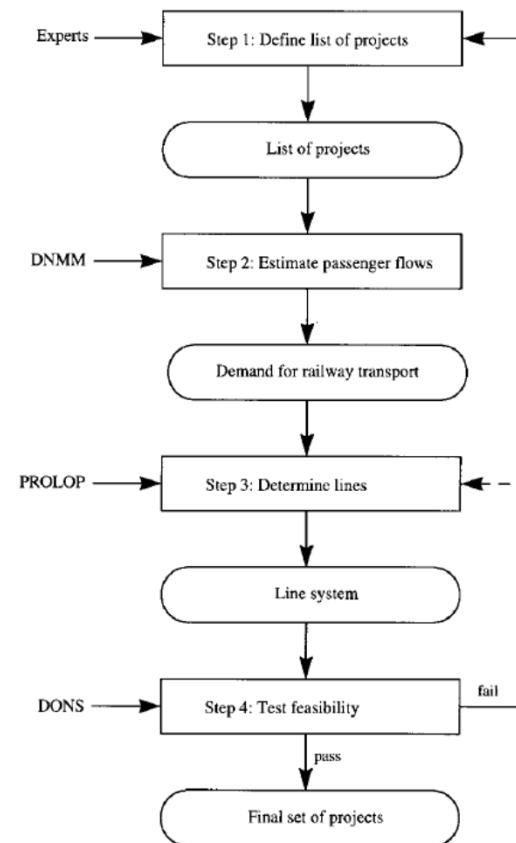

Hooghiemstra (1999)

Complications Due to Jurisdiction, Competition

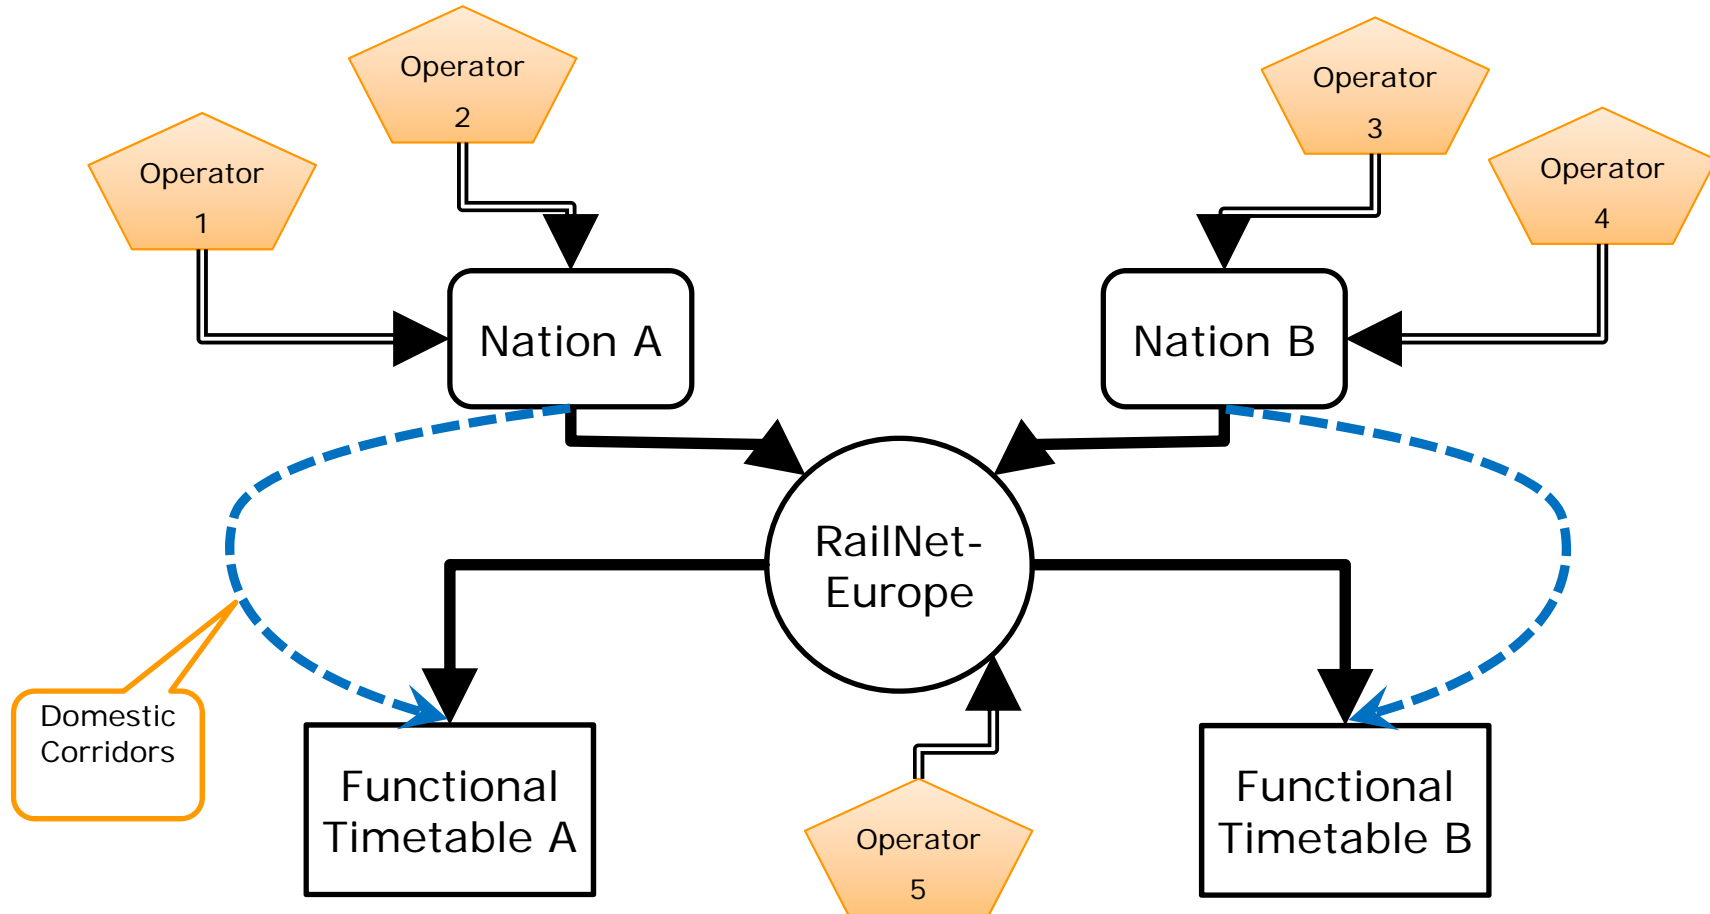


A separate planning process at *each* entity

Typical Planning Calendar - DSB


	2+ years	1 year	2-3 months	Now
Timetable	Commercial aspects	Fixed departure and arrival times	Trackwork and holidays	Disturbances and delays
Rolling Stock	Requirements and budget	"Normal week" capacity, cycles, and tasks	Different capacities on specific days	Assignment of vehicles and maintenance
Maintenance	Maintenance requirements	Planning of maintenance	Workshop plan	Carry out maintenance
Staff	Recruiting, education	Staff and unassigned trips	Inform staff of assignments	Dispatch personal to assignments

Timetabling Process at Banedanmark (Danish Infrastructure)

Present capacity management process before x-11

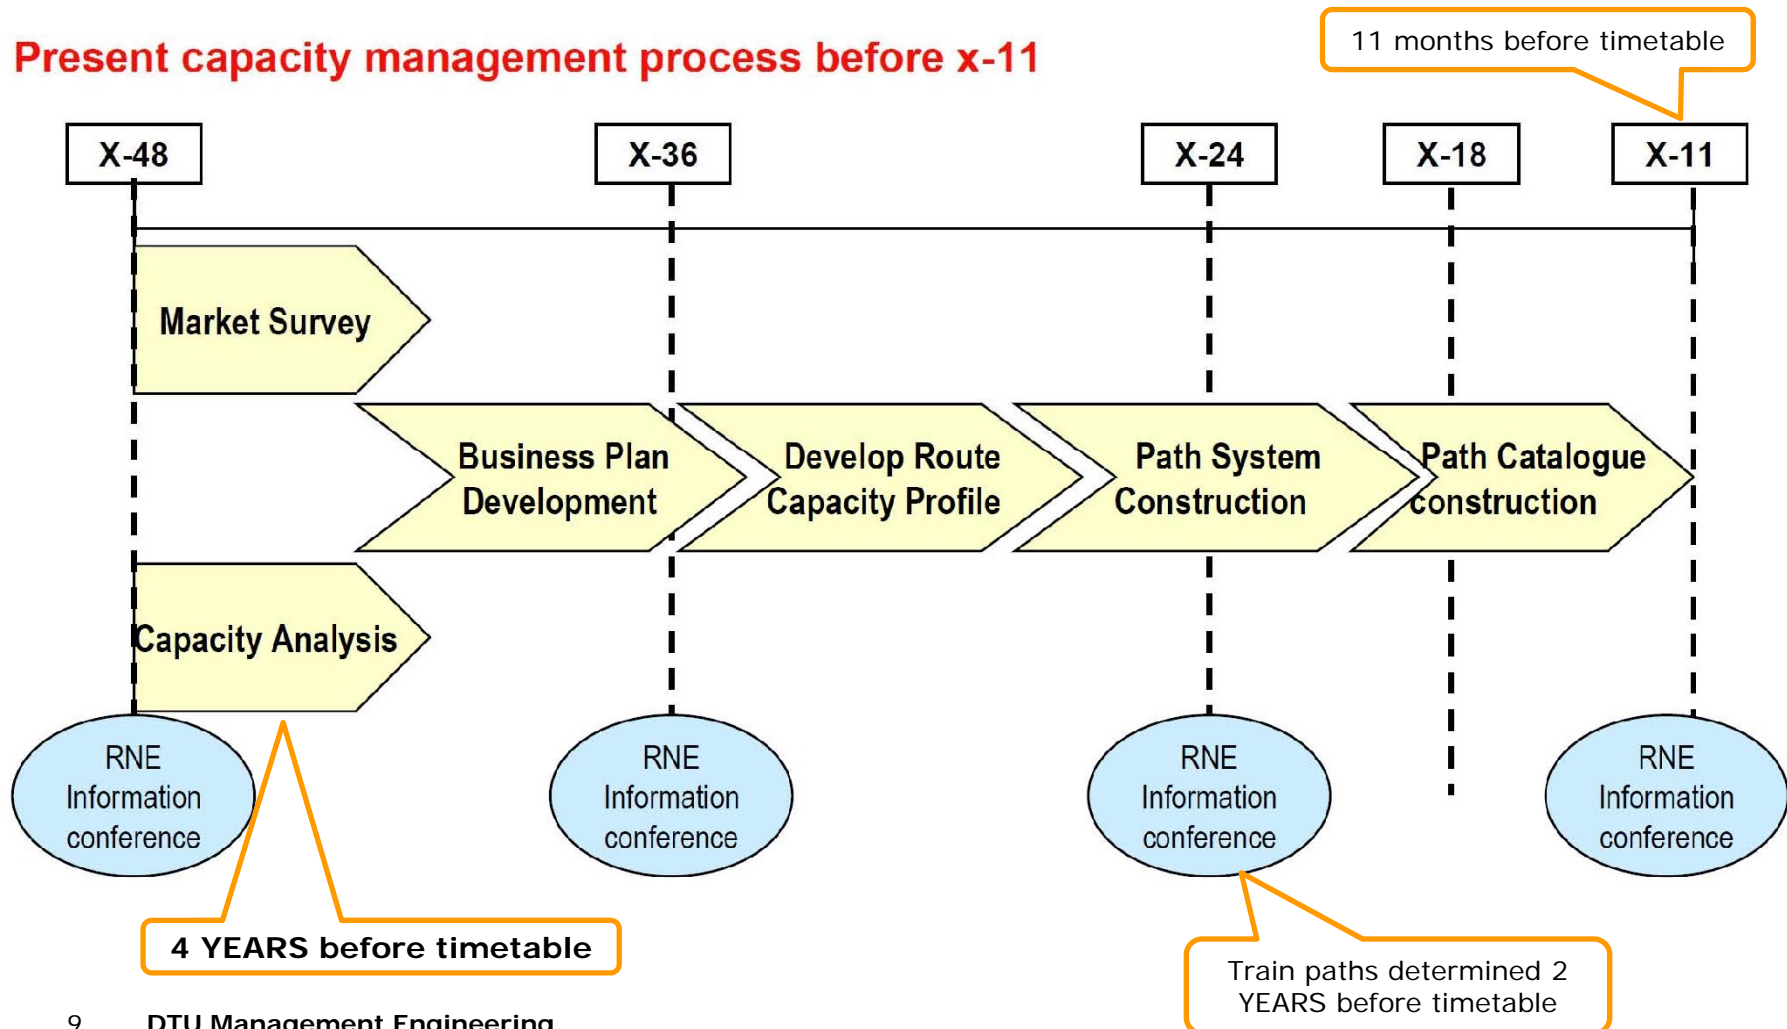


Planning Calendar - EU

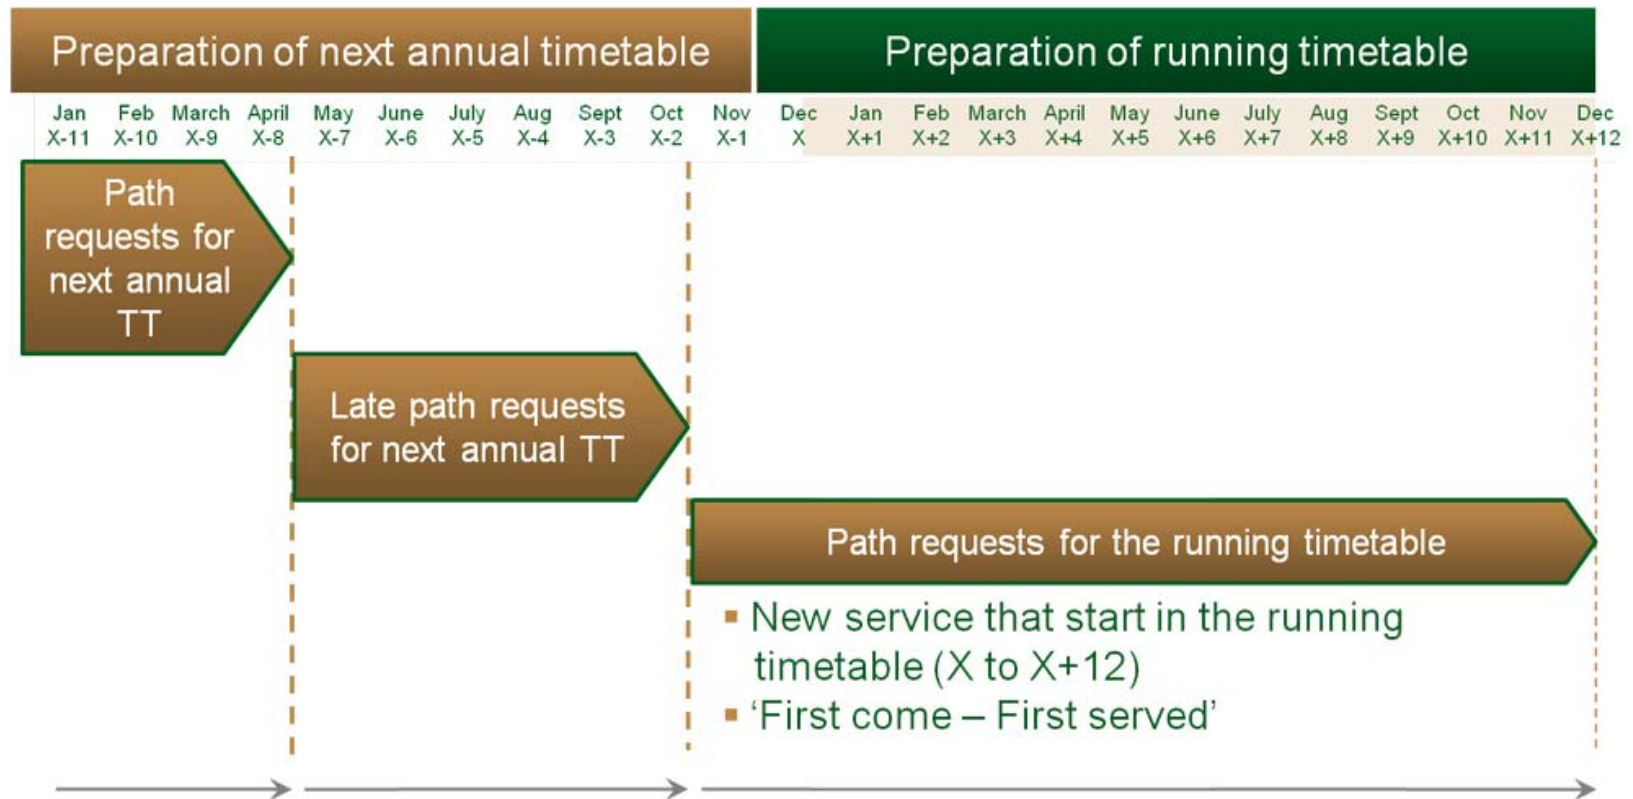

"X" is current timetable

What Defines a Timetable?

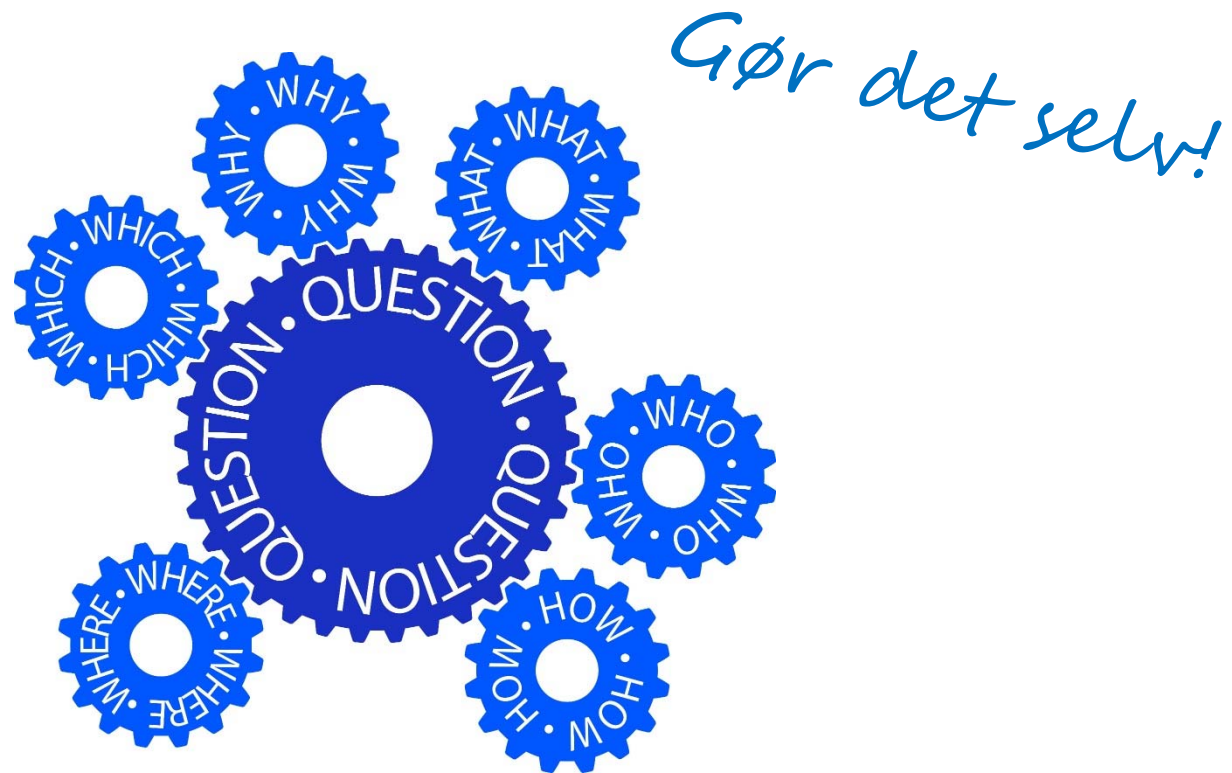

What Defines a Timetable?

In Europe, a timetable at a minimum defines:

- a) Individual paths for the trains to follow on the railway network (dispatching guide)
- b) Infrastructure commitments to individual trains (contracted train paths)
- c) No conflicts between trains (traffic coordination)
- d) It may also define tactical alternatives in case of disruption or changes in market demand


Methods in Application

	Denmark – DSB	Netherlands - NS
Demand Forecasting	National Traffic Model (Landstrafikmodellen)	Dutch National Mobility Model
Train Path Generation	Timetable Planning System (www.hacon.de)	CADANS
Station Shunting	- none -	STATIONS
Line Planning	ILP, Goossens & Kroon (2006)	ILP, "PROLOP", Hooghiemstra (1999)
Validation, Simulation	Railsys (www.rmcon.de)	SIMONE

Some Timetable Definitions


- Feasible timetable: a timetable that is physically possible to operate if no delays occur
- Robust timetable: the ability to absorb small delays (doors held open, wet rail)
- Stable timetable: the ability to recover, to return to plan after a disruption has occurred
- Resilient timetable: a timetable that has options for tactical, ad hoc change to respond to disruptions
 - The ability to change train routes
 - The ability to modify the timing of a few select trains

Train Paths Are a Hard Constraint

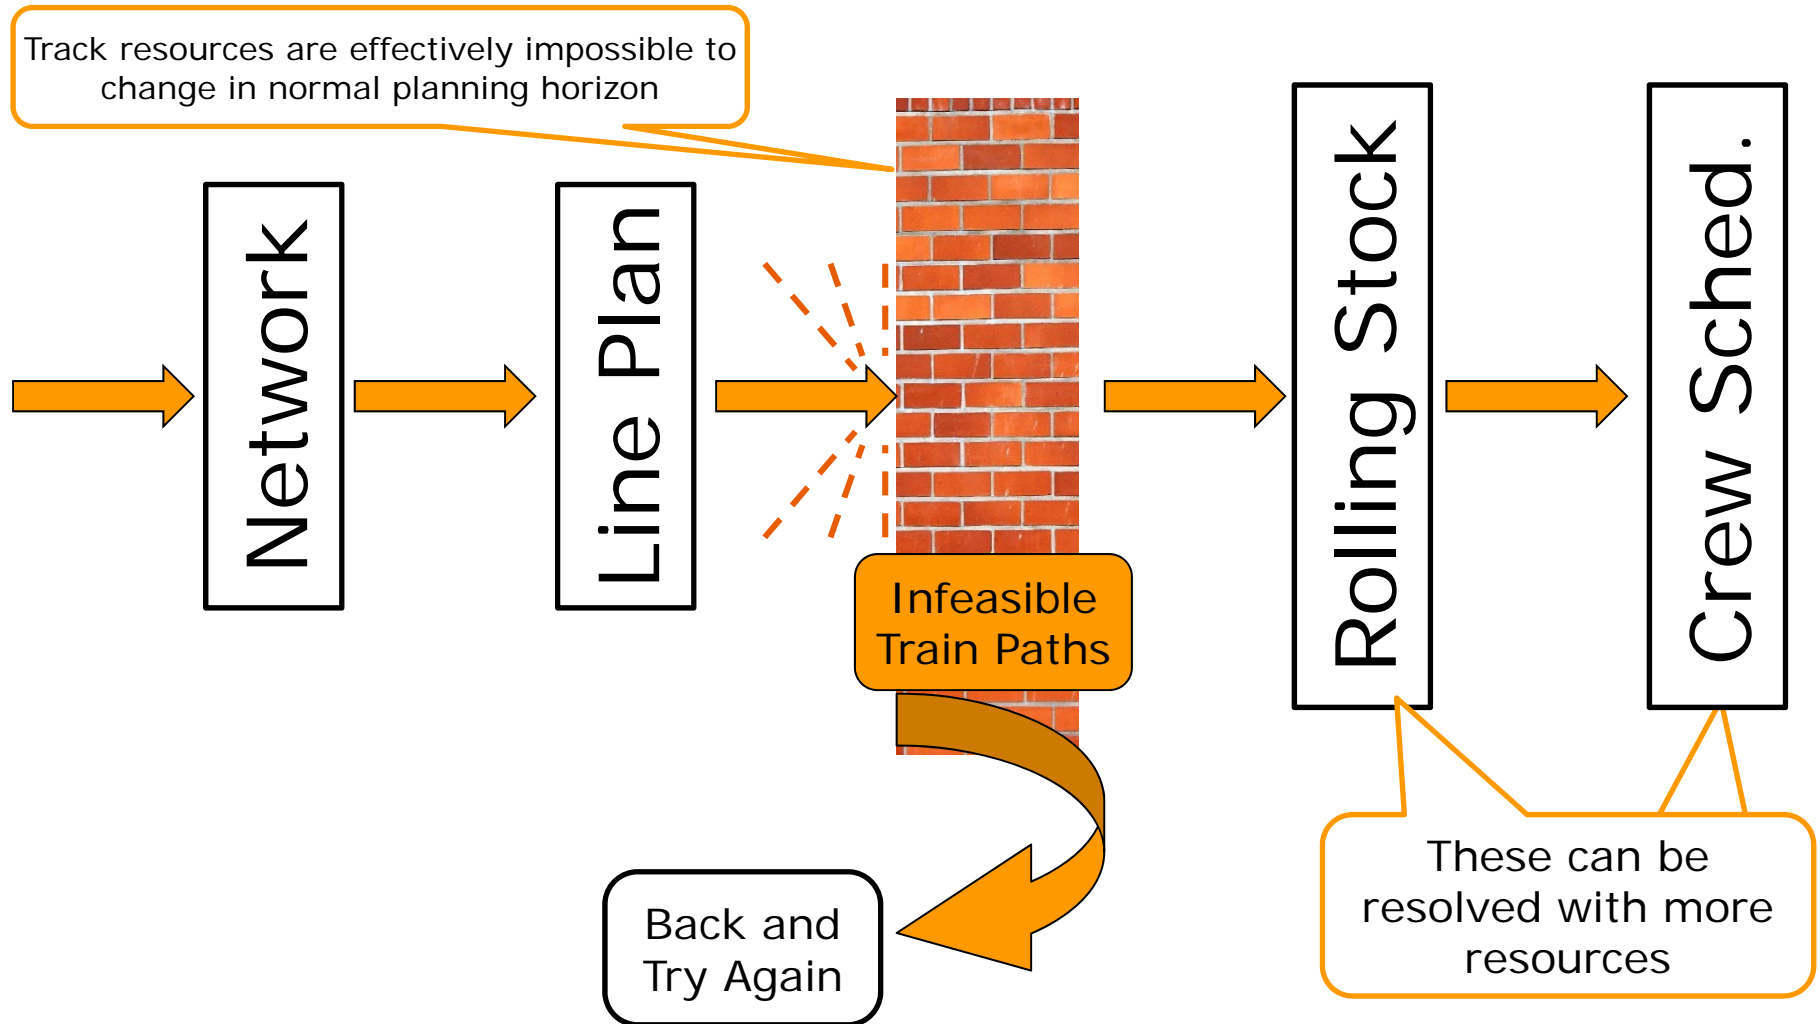

Timetabling

- A Train Path
 - Specific tracks, sidings
 - A contractual commitment
- Train Timings
 - Meet/pass plan
 - Safety separation
- Combinatorial Alternatives

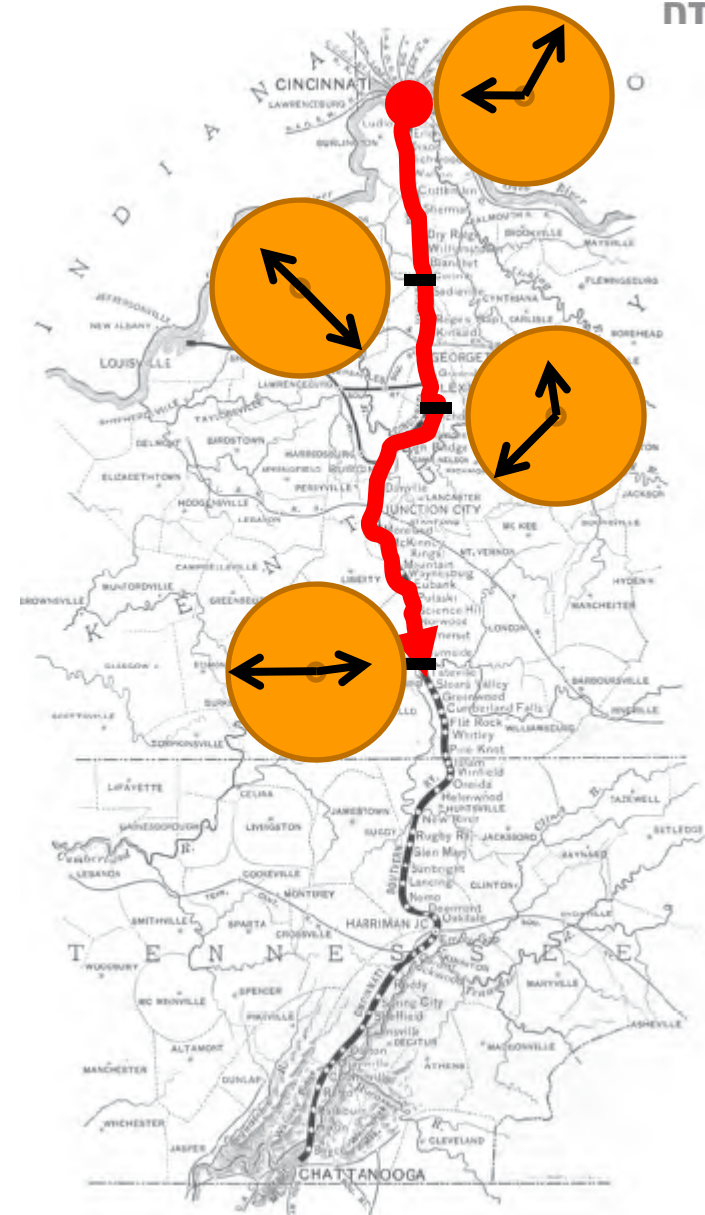

Historic Motivations

- European Land War
 - Harris & Ross (1955) [Ford and Fulkerson]
- High Speed Rail
 - Petersen (1987)
 - Harrod (2009)
- Dispatch Technology
 - Burlington Northern ARES (Jovanovich & Harker, 1990)
 - Southern Railway (Sauder & Westerman, 1983)
- Australia Iron Railways
 - Mees (1991)
 - Higgins (1997)
- Platform Assignment
 - Zwaneveld (1996)


Models

- MISLP
 - Originated at the University of Pennsylvania
 - Trials on Burlington Northern, not implemented
- BIOP
 - Motivated by Australian heavy haul trains
 - Single track focus
- Hypergraph
 - Desire for operationally feasible train paths in solution
 - “Zero basis” solution: no assumption of input set feasibility
- PESP
 - Used successfully in many single direction flows
 - Not a sequencing model, no track occupancies
 - Some challenges in overtake modelling

Mixed Integer Sequencing Linear Program (MISLP)

- Binary Variables
 - Enforce sequencing of pairs of trains
 - I: indicates meet/pass interaction
 - F: first train precedes second train
 - G: first train follows second train
- Real Variables
 - Determine train timings
 - d: departure time from check point
 - a: arrival time at check point

MISLP Sequencing Variables

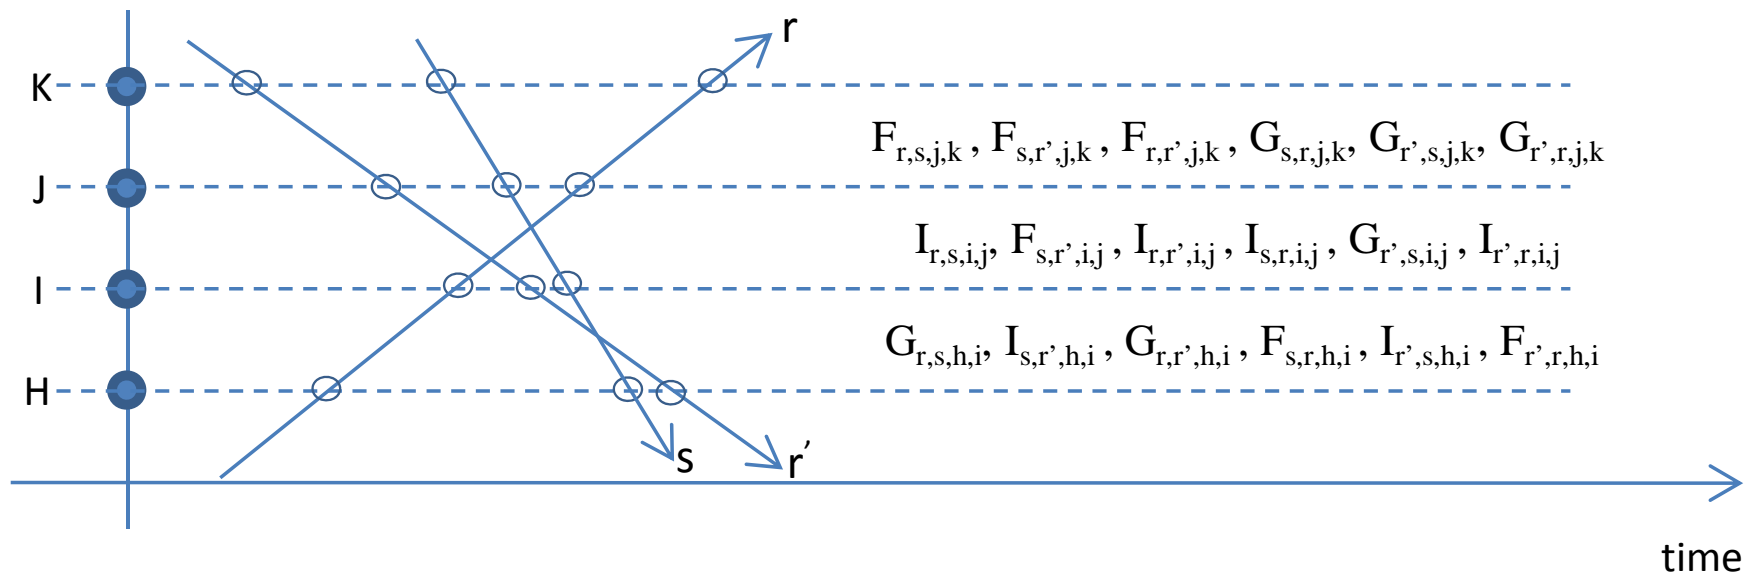

Note that $F_{r',s',j',k}$ implies $G_{s',r',j',k}$

(MISLP)

$$\min \sum_{\substack{r \in R \\ i \in B_r}} [\beta_{r,i} |d_{r,i} - d_{r,i}^*|^\phi + \alpha_{r,i} |a_{r,i} - a_{r,i}^*|^\phi] \quad (1)$$

s.t.

$$d_{r,i} \geq a_{r,i} \quad \forall r \in R; i \in B_r \quad (2)$$

$$I_{r,r',i,j} + F_{r,r',i,j} + G_{r,r',i,j} = 1 \quad \forall r, r' \in R; i, j \in B_r \cap B_{r'} \quad (3)$$

$$a_{r,i} - d_{r,j} \geq s_{r,i,j} + \sum_{\substack{r' \in R \\ i,j \in B_r \cap B_{r'}}} f_{r,r',i,j} I_{r,r',i,j} \quad \forall r \in R; i, j \in B_r \quad (4)$$

$$d_{r,i} - a_{r',i} \geq M(1 - F_{r,r',i,j}) \quad \forall r, r' \in R; i, j \in B_r \cap B_{r'}$$

$$d_{r',j} - a_{r,j} \geq M(1 - G_{r,r',i,j}) \quad \forall r, r' \in R; i, j \in B_r \cap B_{r'}$$

$$a_{r',i} - d_{r,i} \geq M(1 - I_{r,r',i,j}) \quad \forall r, r' \in R; i, j \in B_r \cap B_{r'}$$

$$a_{r,j} - d_{r',j} \geq M(1 - I_{r,r',i,j}) \quad \forall r, r' \in R; i, j \in B_r \cap B_{r'} \quad (5)$$

$$a, d \geq 0 \quad I, F, G \in 0, 1$$

MISLP Comments

- Note that all train interactions are pairwise
- Input train set must be feasible
- Not a capacity model
- No track resource variables, no pricing duals

Binary Integer Occupancy Program (BIOP)

- All timings in discrete units
- Binary variables
- Multicommodity flow
- Network packing

(BIOP)

$$\min \sum_{\substack{r \in R \\ (i,t) \in B^r}} c_{i,t}^r x_{i,t}^r \quad (6)$$

s.t.

$$\sum_{(i,t) \in B^r | i=o^r} x_{i,t}^r = 1 \quad \forall r \in R \quad (7)$$

$$x_{i,t}^r = \sum_{(k,l) \in \Phi_{i,t}^r} x_{k,l}^r \quad \forall r \in R; (i,t) \in B^r | i \neq d^r \quad (8)$$

$$\sum_{(i,t) \in B^r | i=d^r} x_{i,t}^r = 1 \quad \forall r \in R \quad (9)$$

$$\sum_{\substack{m \in R \\ (k,l) \in B^m \cap (\Omega_{i,t} \cup \{(i,t)\})}} x_{k,l}^m \leq 1 \quad \forall (i,t) \in \bigcup_{r \in R} B^r \quad (10)$$


$$x \in \{0, 1\}$$


BIOP Comments

- Explicit track constraints
- Pricing duals for infrastructure
- Input data set need not be wholly feasible
- Not “dispatch ready”

Hypergraph

- Strict occupancy constraint is not operationally feasible
- Model pairs of track segments and their transitions

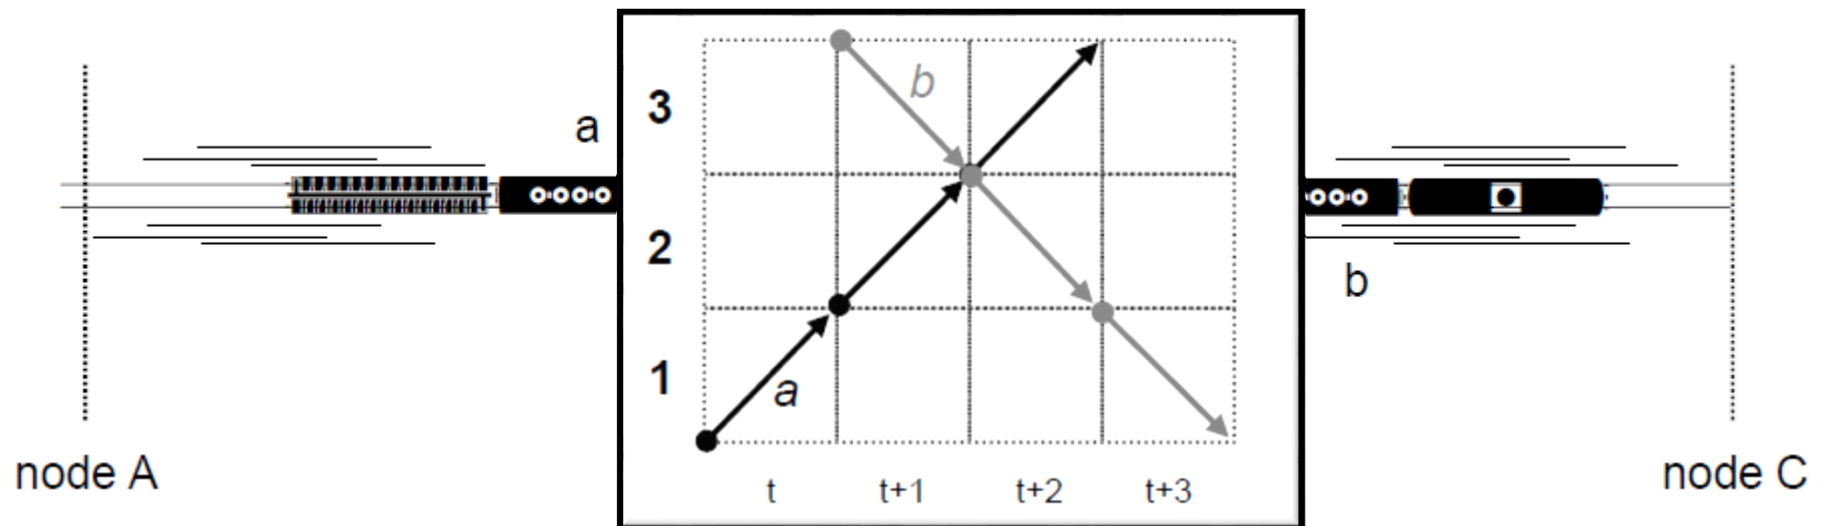

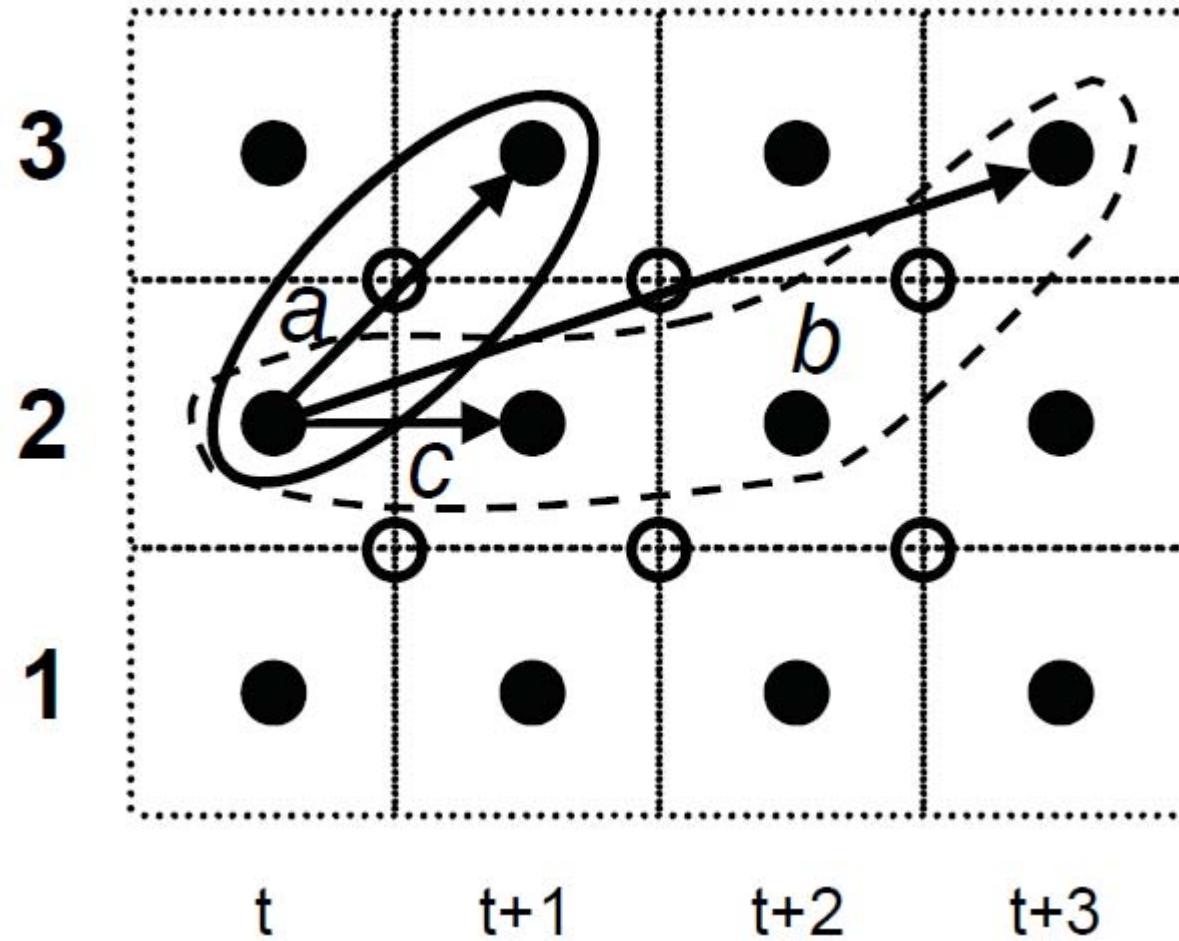

$$\begin{aligned}
\max \quad & \sum_{\substack{r \in R \\ (p_o^r, j, u, v) \in \Psi^r}} (c_p^r + c_e^r(u - p_e^r)) x_{p_o^r, j, u, v}^r \\
& + \sum_{\substack{r \in R \\ (p_d^r, e^r, u, v) \in \Psi^r}} c_l^r (p_l^r - v) x_{p_d^r, e^r, u, v}^r + \sum_{\substack{r \in R \\ (i, j, u, v) \in \Psi^r | i=j}} c_s^r x_{i, j, u, v}^r. \quad (11a)
\end{aligned}$$

Linear Network Constraints

$$\sum_{(p_o^r, j, u, v) \in \Psi^r} x_{p_o^r, j, u, v}^r \leq 1 \quad \forall r \in R \quad (11b)$$

$$\sum_{(a, i, u, t) \in \Psi^r} x_{a, i, u, t}^r = \sum_{(i, j, t, v) \in \Psi^r} x_{i, j, t, v}^r$$

$$\forall r \in R, \{i \in B | i \neq p_o^r\}, t \in T \quad (11c)$$

$$\sum_{(p_d^r, e^r, u, v) \in \Psi^r} x_{p_d^r, e^r, u, v}^r \leq 1 \quad \forall r \in R \quad (11d)$$

$$x \in \{0, 1\}. \quad (11e)$$

Side Constraints

$$\sum_{\substack{r \in R \\ (i,j,u,v) \in \Psi^r | u \leq t < v}} x_{i,j,u,v}^r \leq b_t^i \quad \forall i \in B, t \in T \quad (12a)$$

$$\sum_{\substack{r \in R^N \\ v \in \{t+1-\epsilon, \dots, t+1+\delta\} \\ (i,j,u,v) \in \Psi^r | j=a+1, j \neq i}} x_{i,j,u,v}^r + \sum_{\substack{r \in R^S \\ v \in \{t+1-\epsilon, \dots, t+1+\delta\} \\ (i,j,u,v) \in \Psi^r | j=a, j \neq i}} x_{i,j,u,v}^r \leq v_t^a$$

$$\forall (a, t) \in \mathcal{Y} \quad (12b)$$

$$\sum_{\substack{r \in R^N | h^r \geq 1 \\ a \in \{i-h, \dots, i-1\} \\ (a,j,u,v) \in \Psi^r | u \leq t < v, a \neq j}} x_{a,j,u,v}^r + \sum_{\substack{r \in R^N \\ (i,j,u,v) \in \Psi^r | u \leq t < v}} x_{i,j,u,v}^r \leq b_t^i$$

$$\forall i \in B, t \in T \quad (12c)$$

$$\sum_{\substack{r \in R^S | h^r \geq 1 \\ a \in \{i+1, \dots, i+h\} \\ (a,j,u,v) \in \Psi^r | u \leq t < v, a \neq j}} x_{a,j,u,v}^r + \sum_{\substack{r \in R^S \\ (i,j,u,v) \in \Psi^r | u \leq t < v}} x_{a,j,u,v}^r \leq b_t^i$$

$$\forall i \in B, t \in T. \quad (12d)$$

Hypergraph Comments

- Tractable for Applied Problem Sizes
- Competitive with other published timetabling models
- Indifferent to track structure
- Not pairwise in rulemaking
- Less Suitable for
 - Symmetric data sets (cyclical timetables)
 - Overbooked networks

Periodic Event Scheduling Problem (PESP)

- Primarily formulated for directional, multi-track
- Actually in service
 - Netherlands Railways (2008 Edelman)
 - Berlin U-bahn
- Periodic, “clockface”, timetables


PESP Constraint Structure

$$\tau_j = (\tau_i + x) \bmod T$$


$$x \in [l_{ij}, u_{ij}]$$

l : lower bound of activity time

u : upper bound of activity time

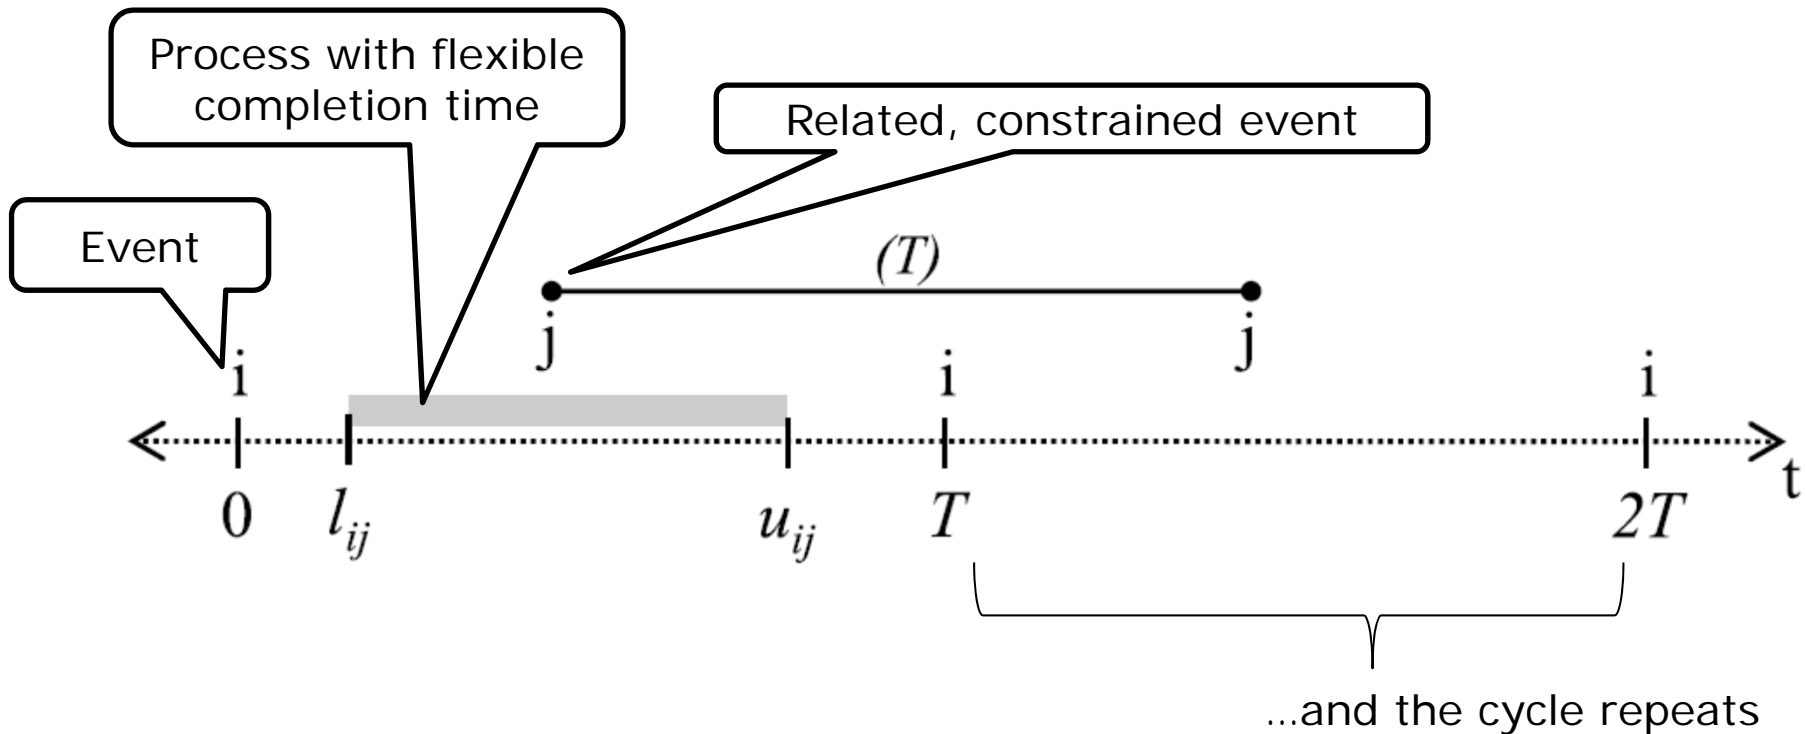


Example PESP Constraint Headway on Line

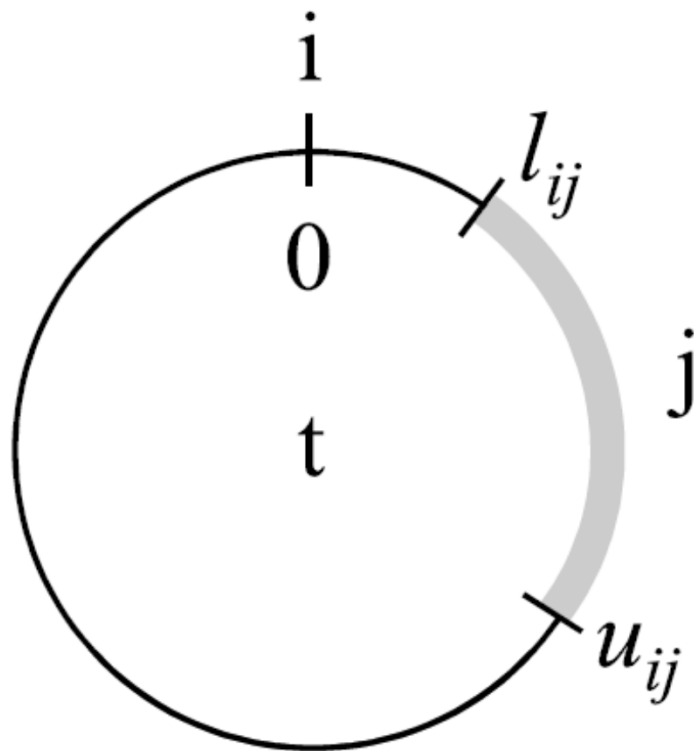

1. Event i : train i passes track signal at time T_i
2. Event j : train j passes same point
3. l : minimum headway between trains
4. u : maximum headway, typically headway between successive services of train i .

Example PESP Constraint Across Platform Connection

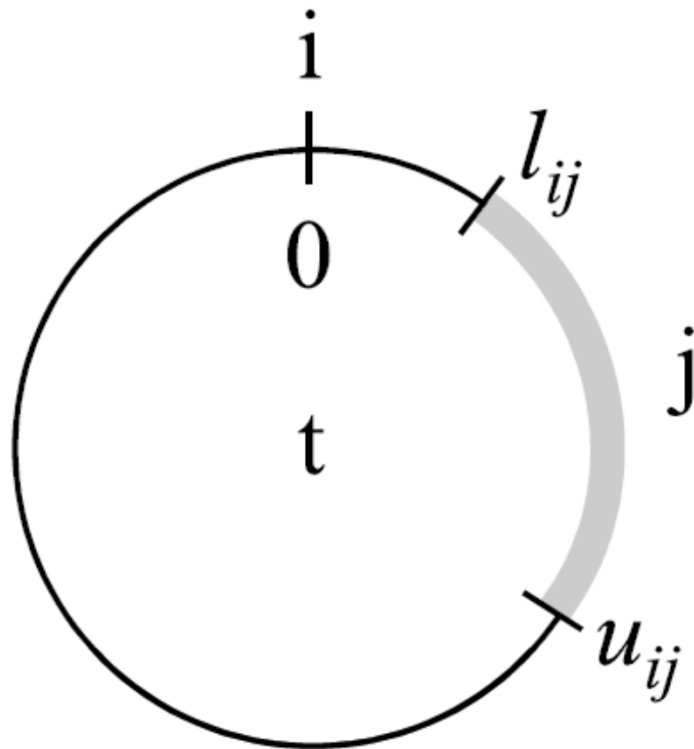

1. Event i : train i arrives at platform 1a
2. Event j : train j departs platform 1b (center platform between tracks)
3. l : minimum walking time across platform
4. u : maximum desired waiting time on platform plus l

Typical PESP Formulation

$$\min \sum_{a \in A} w_a x_a \quad (15)$$

s.t.

$$\Gamma^T x = Tz \quad (16)$$

$$l \leq x \leq u \quad (17)$$

$$z \in \mathbb{Z}^v \quad (18)$$

$$x \in \mathbb{Z}^{|A|}. \quad (19)$$

PESP Comments

- Similar to MISLP, train interactions are pairwise
- Modeling of junctions is challenging
- Input data must be feasible
 - OR- search algorithms must be implemented
- It can be seen that a MISLP with fixed sequences can be reduced to a PESP

Status and Future

Gør det selv!

In 2013, DSB began the process of a major timetable revision for the year 2016, called "K16". Using all the resources of DSB over a two year period, the timetable was completely revised, with half as many time and stopping patterns.

The average passenger journey time in the K16 timetable was

- | | |
|-----------------------|------------------------|
| a) Unchanged | b) 4 min, 02 sec. less |
| c) 1 min, 20 sec less | d) 6 min, 10 sec less |


The average passenger journey time in the K16 timetable was

SOLUTION

- a) Unchanged
- b) 4 min, 02 sec. less
- c) 1 min, 20 sec less
- d) 6 min, 10 sec less

Improved timetabling, by itself, is unlikely to have a significant impact on the customer experience

Future Needs in Timetabling

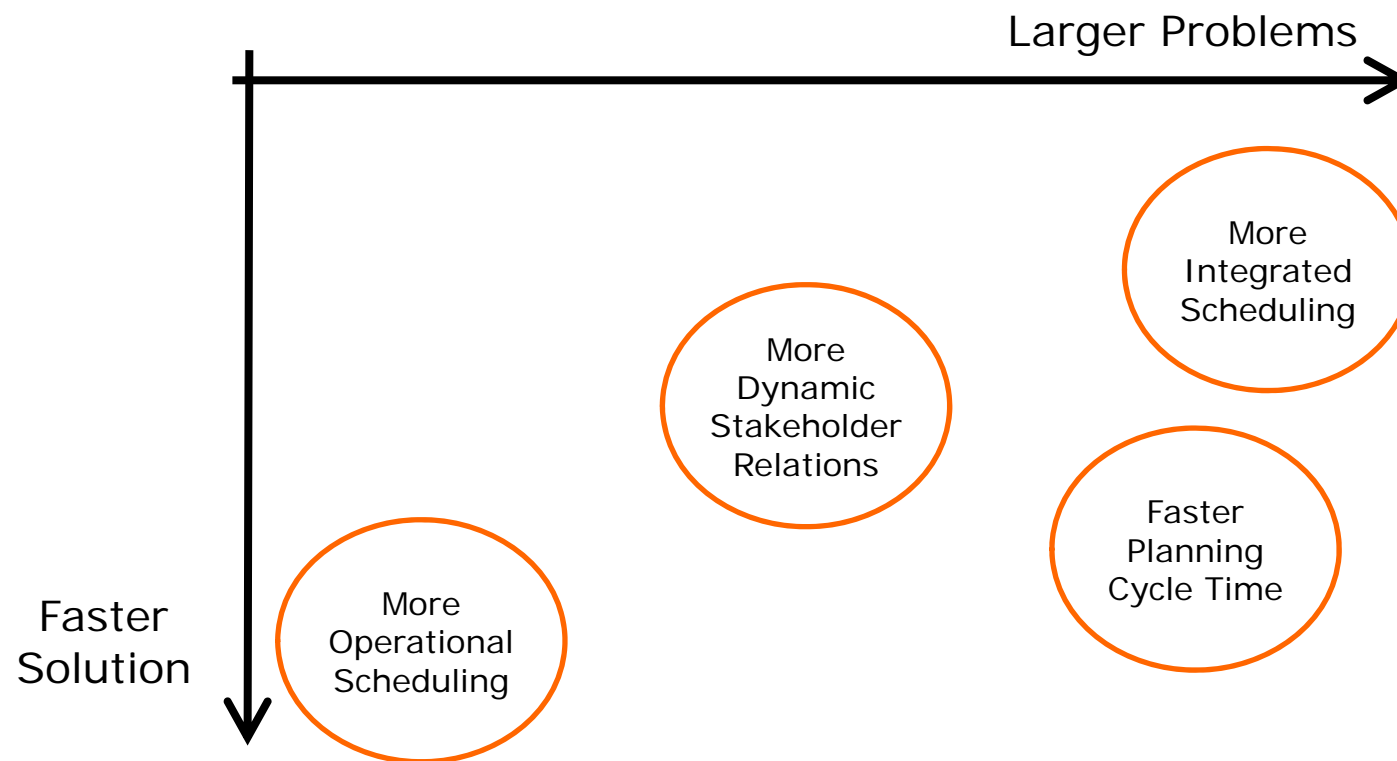

Conclusion

- The timetabling process is long, with many stakeholders
- Train pathing is a fundamental progress point
- There are a variety of train pathing models
- Each has different capabilities for micro optimization of train paths
- Future timetabling needs
 - Larger integrated models with micro train pathing
 - Faster micro train pathing for dispatch support



References

- Brännlund, U. and Lindberg, P.O. and Nöu, A. and Nilsson, J.E., "Railway Timetabling Using Lagrangian Relaxation", *Transportation Science*, Vol. 32, Issue 4, 1998, pp. 358—369
- Burggraeve, Sofie and Bull, Simon Henry and Vansteenwegen, Pieter and Lusby, Richard Martin, "Integrating Robust Timetabling in Line Plan Optimization for Railway Systems", *Transportation Research Part C*, Vol. 77, 2017, pp. 134-160
- Harrod, Steven, "A Tutorial on Fundamental Model Structures for Railway Timetable Optimization", *Surveys in Operations Research and Management Science*, Vol. 17, 2012, pp. 85-96
- Harrod, Steven "Modeling Network Transition Constraints With Hypergraphs", *Transportation Science*, Vol. 45, Issue 1, February 2011, pp. 81-97
- Harrod, Steven and Thomas Schlechte, "A Direct Comparison of Physical Block Occupancy Versus Timed Block Occupancy in Train Timetabling Formulations", *Transportation Research Part E*, Vol. 54, 2013, pp. 50-66
- Hooghiemstra, Jurjen S. and Kroon, Leo G. and Odijk, Michiel A. and Salomon, Marc and Zwaneveld, Peter J., "Decision Support Systems Support the Search for Win-Win Solutions in Railway Network Design", *Interfaces*, Vol. 29, Issue 2, 1999, pp. 15-32
- Lusby, Richard M. and Larsen, Jesper and Ehrgott, Matthias and Ryan, David, "Railway Track Allocation: Models and Methods", *OR Spectrum*, Vol. 33, 2011, pp. 843-883
- Nöu, A. "Railway Timetabling - Lagrangian Heuristics, TRITA/MAT-97-OS12", 1997, Stockholm, Department of Mathematics, Royal Institute of Technology